


1		2		3		4	
NO:		变更内容 TEVISION		日期 DATE		NO:	
①						④	
②						⑤	
③						⑥	
版本 R.NO.		R 0					
制图 DRAWN		审核 AUDIT		核准 CHECK			

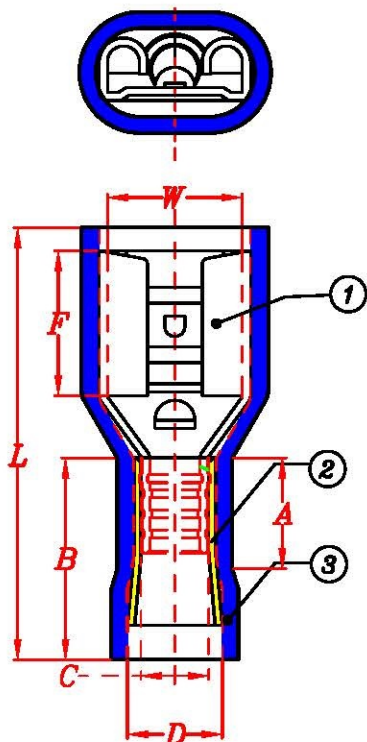

③	VINYL
②	copper
①	Brass
NO.	MATERIAL

NO.	KRIMTERM ITEM	INSULATION COLOR	WIRE RANGE AND I Max.	plug specification	PRODUCT SIZE: mm							
					W	F	L	B	A	C	D	
1	FLVDDF1.25-110A5	RED	0.5-2.5mm² A.W.G: 22-16 I MAX: 10A	(0.5*2.8)	3.2	6.4	19.0	10.5	5.2	1.7	3.8	
2	FLVDDF1.25-110A8			(0.8*2.8)								
3	FLVDDF1.25-187A5			(0.5*4.75)	5.0	6.4	19.0					
4	FLVDDF1.25-187A8			(0.8*4.75)								
5	FLVDDF1.25-250A			(0.8*6.35)								
6	FLVDDF2-187A5	BLUE	1.5-2.5mm² A.W.G: 16-14 I MAX: 15A	(0.5*4.75)	5.0	6.4	19.0	10.5	5.2	2.3	4.7	
7	FLVDDF2-187A8			(0.8*4.75)								
8	FLVDDF2-250A			(0.8*6.35)	6.6	7.2	21.8					
9	LVDDF5.5-250A	YELLOW	2.5-4mm² A.W.G: 14-12 I MAX: 24A	(0.8*6.35)	6.6	7.2	23.8	10.9	5.7	3.4	6.2	
10	LVDDF5.5-375A			(1.2*9.4)	10.0	12.0	30.0					

产品编号 ITEM NO.	FLVDDF	端子材质 TERMINAL MATERIAL	Brass		单位 UNIT: mm
客户编号 PAT NO.		金属厚度 THICKNESS		规格 WIRE RANGE:	
比例 SCALE		绝缘材质 INSULATION MATERIAL	VINYL	温度与电压 MAXIMUM temperature and voltage:	75°C 600 VOLTS MAX.
日期 DATE	2015-03-25	颜色 COLOR		电流 MAXIMUM ELECTRICAL RATING:	